

**Certified
EXPLOSION
PROOF**



Certified by ETL to meet UL standards for Class I, Div 1 and 2, Group D and Class II, Div 1 and 2, Group F & G.



EXPLOSION PROOF SERIES



Accessory Package, 151510DEX, Includes: Vacuum Hose: 1.5" x 10'; Urethane, Static Conductive,, Molded Carbon Impregnated Cuffs; Wand: 54", Aluminum Shaft, 2 Bends; Crevice Tool: 11", Aluminum Body; Round Brush: 3", Nylon Bristles, Static Conductive, Carbon Impregnated; Floor Brush: 14", Metal Body, Anti-Static Bristles; Reducer: 2" x 1.5"

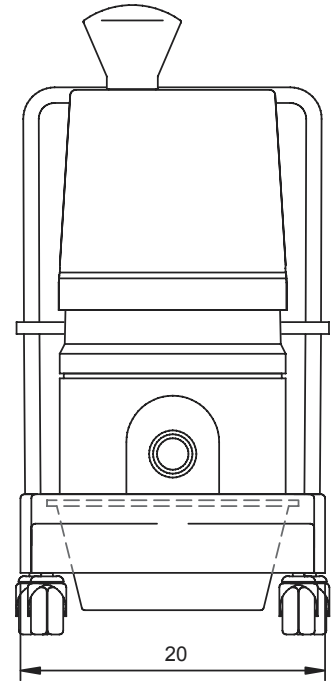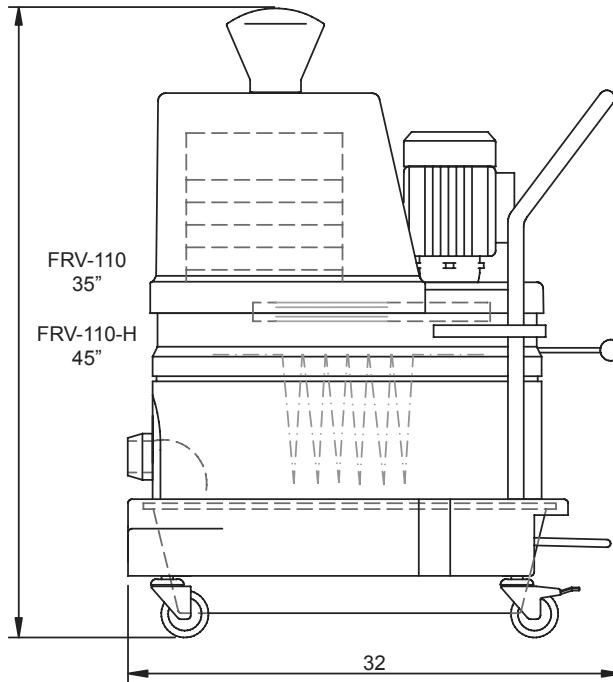

FRV 110 Standard Specifications

- DS1-EX1000 NRTL CERTIFIED EXPLOSION PROOF Motor & Switch, Class I, Class II
- 1.5 HP Motor, 110 Volt, 16 Amp, Single Phase, 60 Hz
- 13 ft² MicroClean BVSC Filter, Manual Shaker System
- 40 ft² HEPA Filter with Minihelic (optional)
- 2" (50mm) Inlet Connection with Bronze Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base with 3" Heavy Duty Conductive Casters
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 10⁻⁶ Ohms



Base Price¹: FRV 110 - Call for Pricing

ADDER	DESCRIPTION
D	Explosion Proof HEPA Module ¹
24000	Static Conductive Disposable Dustpan Liner with Lid ^{ACC1}
15600HDEX	Overhead Cleaning Accessory Kit ^{PKG}
-25	Optional - increase hose length to 25' ^{HOS2}
302120-EX	Extended Caster Frame Assembly w/Antistatic Casters ²
34878	Retractable Grounding Reel w/Stainless Steel Clamp ²

¹EX, ²ADD